



Bostwick Folding Gates

FIXED TOP TRACK & BOTTOM TRACK

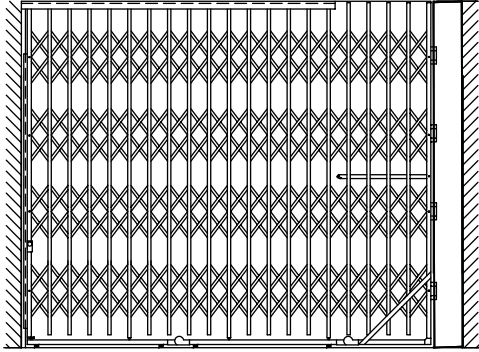

SINGLE GATE 16' MAXIMUM WIDTH

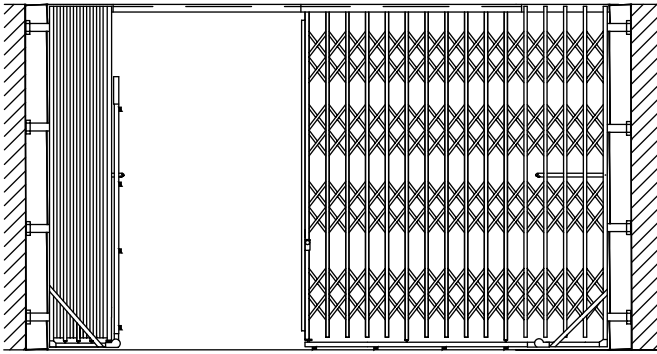

DOUBLE GATE 20' MAXIMUM WIDTH

FEATURES

For use in entryways, Acorn Wire + Iron Works Bostwick Folding Gates offer another layer of break-in defense to locked institutional building doors. All models are available in a wide range of standard heights to custom fit virtually any doorway.

SPECIFICATIONS

- **Channels:** 0.75" spaced vertically not over 6" O.C.
- **Lattice Bars:** 0.625" x 0.1875"
- **End Bars:** Fully enclosed
- **Moving Parts:** Fitted with rollers
- **Material:** Cold-rolled
- **Locks:** Hasp for padlock or cylinder lock
- **Top Guide:** 2.375" x 2.25" channel, the bottom track has gusset braces & rubber floor rests
- **Warranty:** 5 year

APPLICATIONS

- Entrances, Hallways + Stairways
- Cafeterias + Dormitories
- Libraries + Laboratories
- Gymnasiums + Stadiums
- Lecture Halls + Auditoriums
- Administrative Offices
- Utility + Maintenance Rooms
- Shipping + Loading Docks

Product Code	Double or Single Gate	Surface Mount	Shallow Cabinet	Deep Cabinet	Corridor Width	Standard Height
5766D	Double		X		38' max.	3'6" to 12'
5766S	Single		X		19' max.	3'6" to 12'
5765D	Double			X	38' max.	3'6" to 12'
5765S	Single			X	29' max.	3'6" to 12'
5744D	Double	X			8' to 38'	3'6" to 12'
5744S	Single	X			5' to 20'	3'6" to 12'



acornwire.com | 800.552.2676 phone | 888.452.2676 fax

Cabinets

STACKED WIDTH (approximate)

SINGLE DEEP CABINET

corridor (feet)	4	6	8	10	12	14	16
recess (inches)	17	21	31	35	37	42	44

SINGLE SHALLOW CABINET

corridor (feet)	4	6	8	10	12	14	16
recess (inches)	18	21	24	32	35	38	42


DOUBLE DEEP CABINET

corridor (feet)	4	6	8	10	12	14	16
recess (inches)	9	11	16	18	19	21	22


DOUBLE SHALLOW CABINET

corridor (feet)	4	6	8	10	12	14	16
recess (inches)	9	11	12	16	18	19	21


STYLES




Surface Mounted Shallow Cabinet



Recessed Shallow Cabinet



Surface Mounted Deep Cabinet



Recessed Deep Cabinet

SPECIFICATIONS

- **Material:** 0.1875" cold-rolled Z bar frames with 16-gauge steel backs
- **Edges:** Formed 'C' edges on flush 16-gauge door
- **Special Gate Hinges:** Permit cabinet doors to close & lock when gate is in both stacked & extended position
- **Gate & Cabinet Locks:** 0.46875" diameter 5 pin tumbler mortise cylinders keyed alike, or master keyed to building
- **Gate & Cabinet Finish:** Standard, color as selected

Finishes & Options

POWDER COATED COLORS



Custom colors available. Contact us for a consultation or samples. Premium price applies for white & yellow.

Colors shown in print may not be an exact representation of the true product color.

LOCKS




SAFETY & EXIT DEVICE OPTIONS

For School & Fire Code requirements

COLLAPSIBLE EMERGENCY EXIT DEVICE


OHIO EMERGENCY DEVICE

WIRE MESH SIDE PANEL ADDITIONS




Bostwick Folding Gates

FOLDING TOP TRACK & BOTTOM TRACK

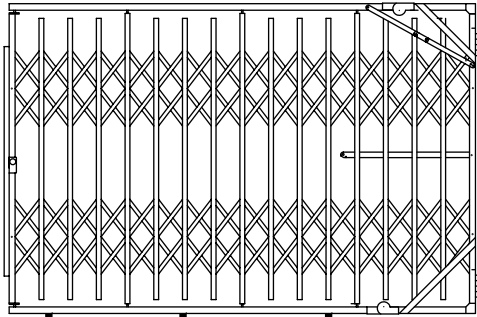

SINGLE GATE 16' MAXIMUM WIDTH

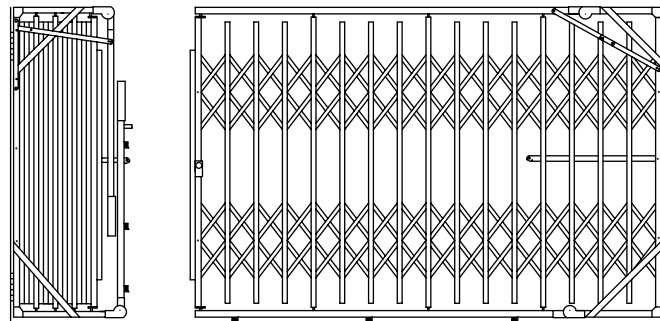

DOUBLE GATE MAXIMUM WIDTH

FEATURES

Bostwick Folding Gates for school applications control corridor traffic. When partially closed, gates limit main traffic flow during after-school sporting events and other activities. When fully expanded, gates create a sturdy blockade from unwanted access.

Also for use in entryways, these gates offer another layer of break-in defense to locked school doors. All fixed security folding gates can be locked into place in both the stacked and extended positions for greater security control.

SPECIFICATIONS

- **Channels:** 0.75" spaced vertically not over 6" O.C.
- **Lattice Bars:** 0.625" x 0.1875"
- **End Bars:** Fully enclosed
- **Moving Parts:** Fitted with rollers
- **Material:** Cold-rolled
- **Locks:** Hasp for padlock or cylinder lock
- **Hinged Top & Bottom Tracks:** Gusset braces in all corners, fixed support for top track & rubber floor rests for bottom
- **Warranty:** 5 year

APPLICATIONS

- Entrances, Hallways + Stairways
- Cafeterias + Dormitories
- Libraries + Laboratories
- Gymnasiums + Stadiums
- Lecture Halls + Auditoriums
- Administrative Offices
- Utility + Maintenance Rooms
- Shipping + Loading Docks



Product Code	Double or Single Gate	Surface Mount	Shallow Cabinet	Deep Cabinet	Corridor Width	Standard Height
5743D	Double	X			25' max	7' & 7'6"
5743S	Single	X			16' max	7' & 7'6"
5761D	Double		X		25' max.	7' & 7'6"
5761S	Single		X		16' max.	7' & 7'6"
5762D	Double			X	25" max.	7' & 7'6"
5762S	Single			X	16' max.	7' & 7'6"



acornwire.com | 800.552.2676 phone | 888.452.2676 fax

Cabinets

STACKED WIDTH (approximate)

SINGLE DEEP CABINET

corridor (feet)	4	6	8	10	12	14	16
recess (inches)	17	21	31	35	37	42	44

SINGLE SHALLOW CABINET

corridor (feet)	4	6	8	10	12	14	16
recess (inches)	18	21	24	32	35	38	42


DOUBLE DEEP CABINET

corridor (feet)	4	6	8	10	12	14	16
recess (inches)	9	11	16	18	19	21	22


DOUBLE SHALLOW CABINET

corridor (feet)	4	6	8	10	12	14	16
recess (inches)	9	11	12	16	18	19	21


STYLES




Surface Mounted Shallow Cabinet



Recessed Shallow Cabinet



Surface Mounted Deep Cabinet



Recessed Deep Cabinet

SPECIFICATIONS

- **Material:** 0.1875" cold-rolled Z bar frames with 16-gauge steel backs
- **Edges:** Formed 'C' edges on flush 16-gauge door
- **Special Gate Hinges:** Permit cabinet doors to close & lock when gate is in both stacked & extended position
- **Gate & Cabinet Locks:** 0.46875" diameter 5 pin tumbler mortise cylinders keyed alike, or master keyed to building
- **Gate & Cabinet Finish:** Standard, color as selected

Finishes & Options

POWDER COATED COLORS



Custom colors available. Contact us for a consultation or samples. Premium price applies for white & yellow.

Colors shown in print may not be an exact representation of the true product color.

LOCKS

SAFETY & EXIT DEVICE OPTIONS

For School & Fire Code requirements

COLLAPSIBLE EMERGENCY EXIT DEVICE

OHIO EMERGENCY DEVICE

WIRE MESH SIDE PANEL ADDITIONS

